

EXTRABLOCK®




Sunblaze

UVR: 97.6 UPF: 41 Shade: 94.9'



Cream (non fr)

UVR: 95.4 UPF: 21 Shade: 81.4'

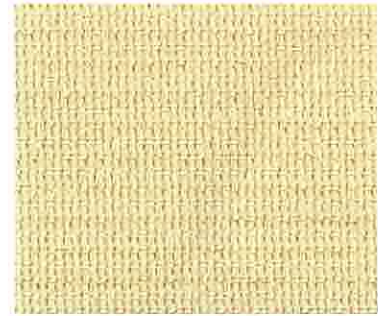

Beige (non fr)

UVR: 95.3 UPF: 21 Shade: 86.8'



Silver

UVR: 97.3 UPF: 37 Shade: 95.5'



Forest Green

UVR: 95.7 UPF: 23 Shade: 93'



True Blue

UVR: 97.1 UPF: 34 Shade: 94.5'



Midnight*



Charcoal*



Latte*

**New colour and technical data will be available soon*

Please also refer to an actual sample before specifying colours, as colours can vary due to the printing process

Weight	330gsm	Tear Strength ASTM D 1424	Warp 200N, Weft 196N
Width	300cm lay flat & centre folded	Elongation at Break ASTM D 4595	Warp 68%, Weft 58%
Length	32mt & 50mt. Customer lengths upon request	Breaking Force AS 2001.2.3.2	Warp 979N, Weft 1228N
FR ASI530.2	Flammability 1, Spread 0, Heat 1	UVR/UPF/SHADE COVER	AS 4174
FR ASI530.3	Ignitability 1.3, Spread 7, Heat 2, Smoke 5	UV Warranty	**10 Years
Burst AS2001.2.4	Mean 3000KPa	Stentered	Yes, steam stentered in a flat position for superior lay flat fabric as opposed to hot rollers
Strip Tensile ASTM D 4595	Warp 18kN/m, Weft 26 kN/m		

**Conditions Apply



P: 1300 854 166
F: 1300 658 889
hvg@halifaxvogel.com.au
www.halifaxvogel.com.au

Available from:



www.alnet.co.za